




# ANHUI HANHAI NEW MATERIAL CO., LTD.

www.ahmagnet.com | Tel.: +86-755-82821802 | E-mail: support@ahmagnet.com

## Standard Sintered NdFeB (Neodymium Magnets)

## N38

Characteristic	Units	Min	Max
		Br	T
Hcb	KGs	12.3	12.8
	kOe	≥10.8	
Hcj	kA/m	≥861	
	kOe	≥12	
BH Max	kA/m	≥955	
	MGOe	36	39
	kJ/m <sup>3</sup>	287	310
α (Br)	%/°C	-0.12	
β (Hcj)	%/°C	-0.70	
Max Temperature	°C	≤80	
Density	g/cm <sup>3</sup>	7.50	

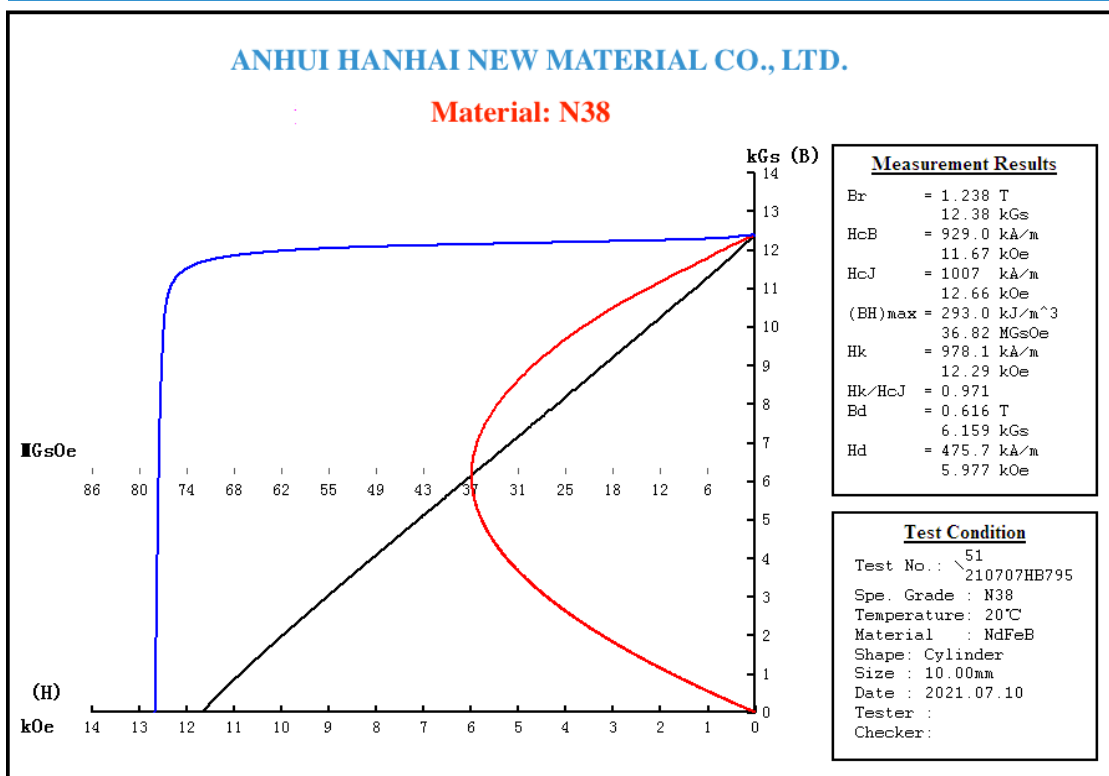

**Notes** The material data and demagnetization curves shown above present typical. properties that may vary due to product size, shape and coating.

Additional grades and customized magnets are available. Please contact us for more information.

Address: Zongsi Road, Economic and Technology Development Area, Luan City, Anhui Province, 23700, China.