




ANHUI HANHAI NEW MATERIAL CO., LTD.

www.ahmagnet.com | Tel.: +86-755-82821802 | E-mail: support@ahmagnet.com

Standard Sintered NdFeB (Neodymium Magnets)

N35EH

Characteristic	Units	Min	Max
		Br	T
Hcb	KGs	11.8	12.4
	kOe	≥11.0	
Hcj	kA/m	≥877	
	kOe	≥30	
BH Max	kA/m	≥2388	
	MGOe	33	37
	kJ/m ³	263	295
α (Br)	%/°C	-0.10	
β (Hcj)	%/°C	-0.50	
Max Temperature	°C	≤200	
Density	g/cm ³	7.65	

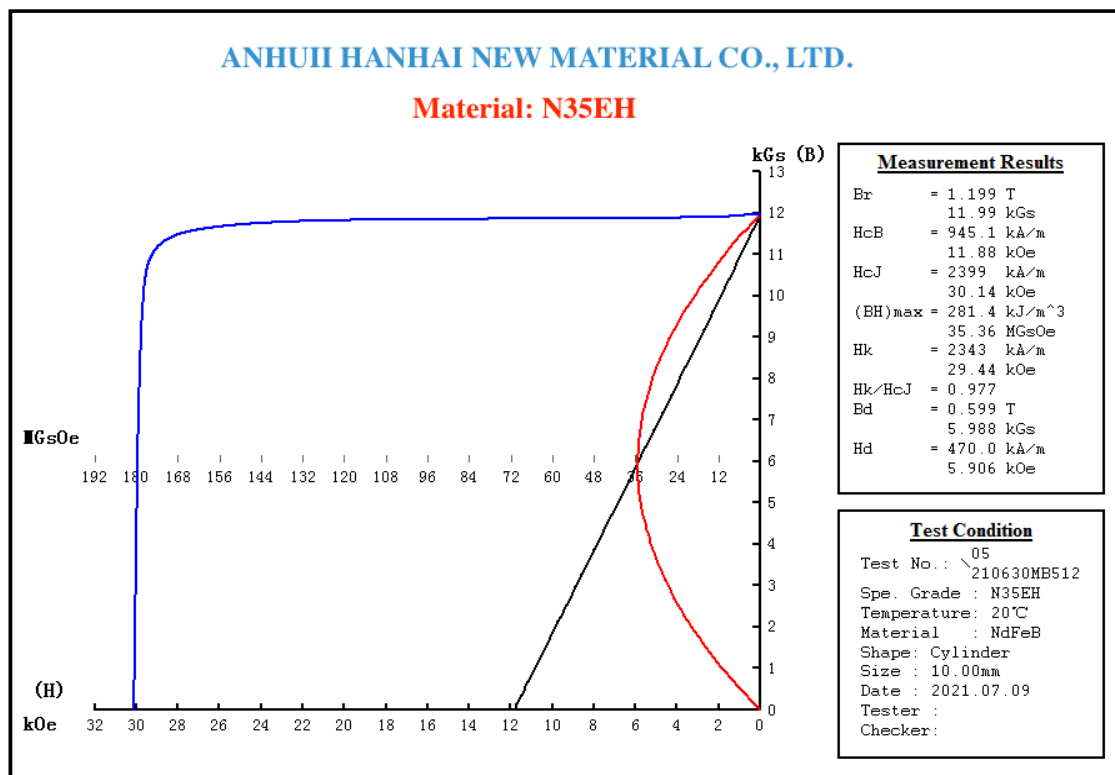

Notes The material data and demagnetization curves shown above present typical. properties that may vary due to product size, shape and coating.

Additional grades and customized magnets are available. Please contact us for more information.

Address: Zongsi Road, Economic and Technology Development Area, Luan City, Anhui Province, 23700, China.